




MEGUS INTERNATIONAL CO., LTD

Bellow boots covers questionnaire

Item	
1.Inner diameter/Outer diameter	A:_____B:_____
2.Inner collar diameter(both end)	C:_____D:_____
3.Collar height(both end)	H:_____
4.Maximum length of bellows	Lmax:_____
5. Minimum length of bellows	Lmin:_____
6.Flange installed type (please choose)	☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5
7.Order quantities	QTY:_____
8.If there is special requirement, please provide the drafting (ex: H=30mm)	

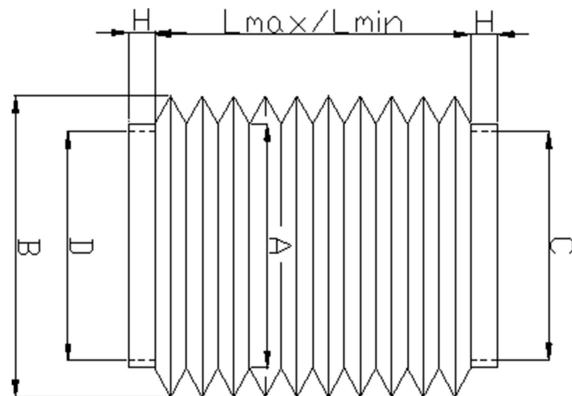

Notice :

- | | |
|-----------------------------------|---|
| 1. Copy used is available | 1. Occasion : |
| 2. TEL: +886-4-22715311 | ☐ Indoor ☐ Outdoor ☐ Anti-UV |
| 3. FAX: +886-4-22715312 | ☐ Acid and alkali proof |
| 4. E-mail:sales@megus1989.com | ☐ heat proof |
| 5. No. 42, Gongye 15th Rd., | ☐ oil proof ☐ water proof |
| Taiping Dist., Taichung City 411, | ☐ anti-dust ☐ cleanroom |
| Taiwan (R.O.C.) | |

Bellows									
Dimensions	Standard fold	Inner diameter (A)	Outer diameter (B)	Up collar inner diameter (C)	Down collar inner diameter (D)	Collar height (H)	Lmax	Lmin	Remark
20	36P	20	44	20	20	8	600	120	
25	24P	25	56	25	25	15	500	100	
30	20P	30	50			Flat	320	40	30 Thin
30	20P	30	50	30	30	15	320	40	30 Thin
30	36P	30	50	30	30	10	600	120	
40	25P	40	64	40	40	15	450	75	
50	16P	50	74			Flat	350	45	50 Thin
50	28P	50	74	50	50	15	500	80	
63	25P	63	95	63	63	15	600	85	
70	15P	70	95	70(H30)	70(H25)		280	45	C≠D
83	25P	83	117	83	83	15	600	85	
100	14P	100	130	100(H20)	130(H15)		250	40	C≠D
115	30P	115	145	115	110	15	600	110	C≠D
115	25P	115	145	115	115	15	450	80	
130	15P	130	160	130	130	20	300	55	
180	10P	180	220	180	180	20	250	35	

