


鋅製防水型外螺紋接頭 Liquidtight End Connector



TYPE ZGSM (外螺紋接頭)

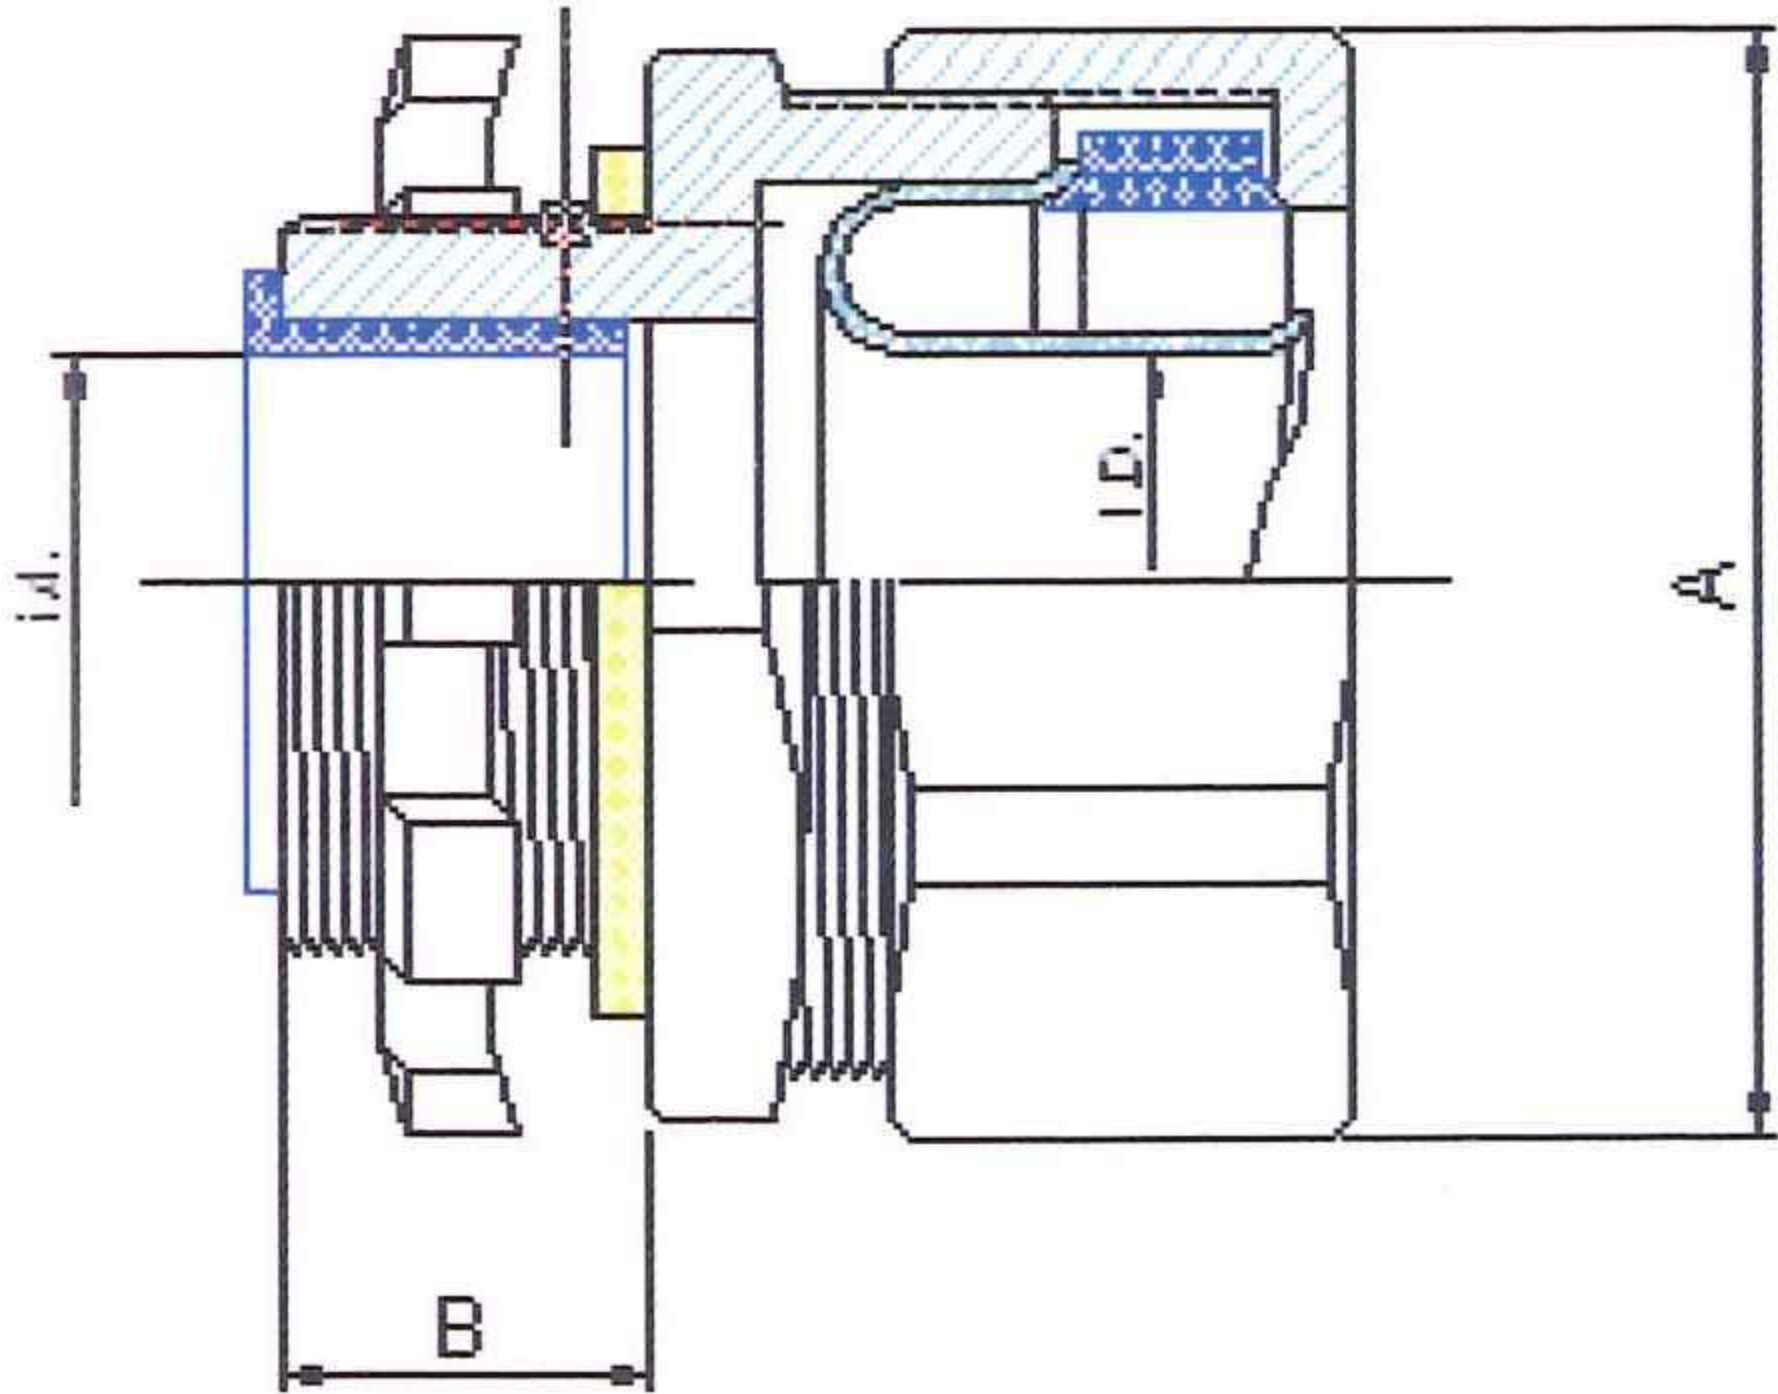


- 產品材質： 采用鋅合金壓鑄而成，表面鍍鋅或鍍鉻；TPE塑料，改性橡膠
- 防護等級： IP66
- 產品性能： 防液體滲漏，耐腐蝕，機械强度高，通過RoHS測試
- 適用範圍： 適用於C型和W型防水金屬軟管于設備的連接

- ☐ Type-ZGSM
ZGSM is suitable for the liquidtight metallic conduit type C and type W .
- ☐ Material： Zinc alloy, zinc or chrome surface ; TPE plastics, rubber modified
- ☐ Protection Degree： IP66
- ☐ Properties： Liquidtight , corrosion resistance,high mechanical strength, passed RoHS

適配軟管 For conduit size	螺紋 Thread size	螺紋 Thread size
3/16"	G1/4	M14*1.5
1/4"	G1/4	M16*1.5
5/16"	G5/16	M16*1.5
3/8"	G1/2	M20*1.5
1/2"	G1/2	M20*1.5
3/4"	G3/4	M25*1.5
1"	G1	M32*1.5(2)
1-1/4"	G1-1/4	M40*1.5(2)
1-1/2"	G1-1/2	M50*1.5(2)
2"	G2	M63*1.5(2)
2-1/2"	G2-1/2	M75*1.5(2)
3"	G3	M85*1.5(2)
4"	G4	M100*1.5(2)

■ 鋅製防水型彎接頭
Liquidtight Metal Connector

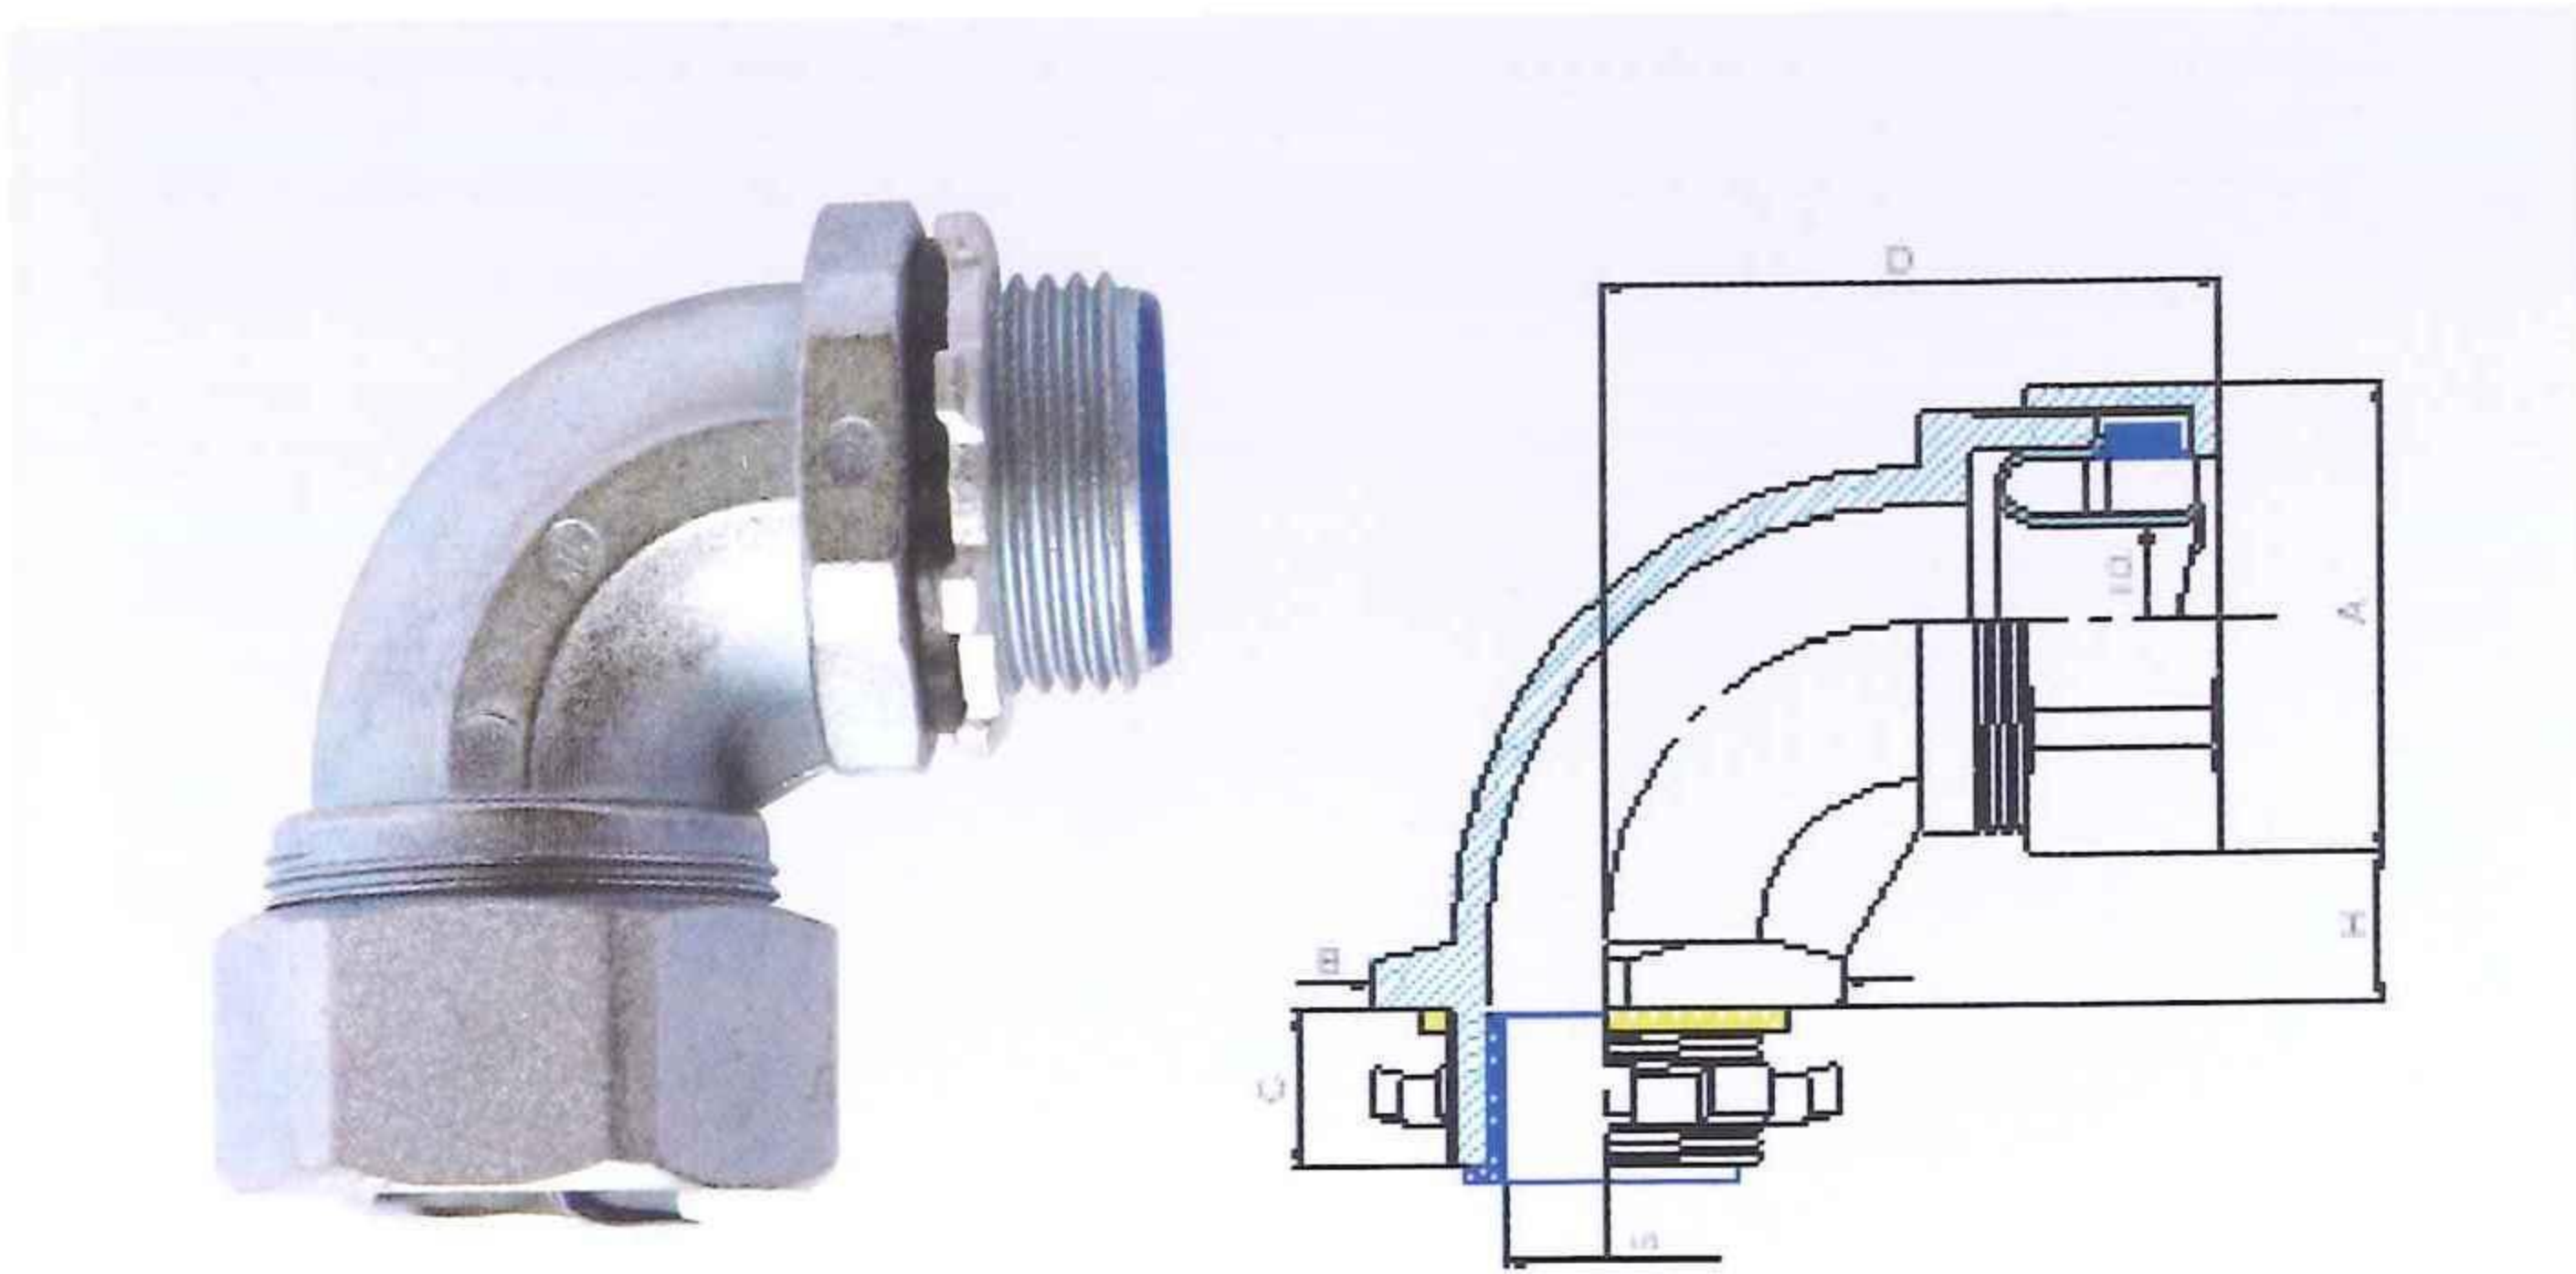

TYPE ZGLM (外螺紋接頭90°)

- ☐ Type- ZGLM
ZGLM is suitable for the liquidtight metallic conduit type C and type W .
- ☐ Material: Zinc alloy, zinc or chrome surface ; TPE plastics, rubber modified .
- ☐ Protection Degree: IP66
- ☐ Properties: Liquidtight , corrosion resistance,high mechanical strength, passed RoHS

- 產品材質: 采用鋅合金壓鑄而成，表面鍍鋅或鍍鉻；TPE塑料，改性橡膠
- 防護等級: IP66
- 產品性能: 防液體滲漏，耐腐蝕，機械强度高，通過RoHS測試
- 適用範圍: 適用於C型和W型防水金屬軟管于設備的連接

適配軟管 For conduit size	螺紋 Thread size
3/8"	G1/2
1/2"	G1/2
3/4"	G3/4
1"	G1
1-1/4"	G1-1/4
1-1/2"	G1-1/2
2"	G2
2-1/2"	G2-1/2
3"	G3
4"	G4